TIRE GROUP INTERNATIONAL, LLC.

TIRE GROUP INTERNATIONAL, LLC
7500 N.W. 35th Terrace, Miami, FL 33122 U.S.A
Telf. 1 305.696.00.96
Fax: 305.696.5926

EMBODIMENT OF STRENGTH & STABILITY

PCR TIRES
CATALOGUE
2015

POWERTRAC

EMBODIMENT OF STRENGTH & STABILITY

PCR TIRES

Patterns Introduction

Embodiment Of Strength & Stability

CITYMARCH

CITYTOUR

VANTOUR

VANMARCH

CITYRACING

ROADMARCH

CITYROVER

POWER LANDER A/T

POWER ROVER M/T

SNOWSTAR

SNOWTOUR

TOURSTAR

RACINGSTAR

PRIME MARCH-H/T

VANSTAR

CITYMARCH

UTQG: 420 A A

1. Perfct handling performance and good cornering performance.
2. Asymmetric pattern shape, optimized variable pitch pattern design, provide quiet ride environment.
3. Nice driving pleasure comes from strong tread and soft sidewall.
4. Silica tread compound for low rolling resistance and good wet grip.

Summer Tire

Sizes Description		Sidewall Description	Tread Depth		Standard Rim	Section Width(mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
			MM	1/32"								
185/60R14	82H	BLK	7.50	9.4	5.5	189	578	300/44	-	-	-	-
195/55R15	85V	BLK	7.80	9.8	6.0	201	595	300/44	-	-	-	-
195/60R15	88H	BLK	7.80	9.8	6.0	201	615	300/44	-	-	-	-
195/60R15	88V	BLK	7.80	9.8	6.0	201	615	300/44	-	-	-	-
205/55R16	91H	BLK	7.80	9.8	6.5	214	632	300/44	-	-	-	-
205/55R16	91V	BLK	7.80	9.8	6.5	214	632	300/44	-	-	-	-
215/55R16	93H	BLK	8.00	10.0	7.0	226	642	300/44	-	-	-	-
215/60R16	95H	BLK	8.00	10.0	6.5	221	664	300/44	-	-	-	-
225/60R16	98H	BLK	8.00	10.0	6.5	228	676	300/44	-	-	-	-
235/60R16	100H	BLK	8.00	10.0	7.0	240	688	300/44	-	-	-	-

CITYTOUR

UTQG: 420 A A

1. Four wide circumferential tread grooves deliver the ride stability and offer excellent performance on wet conditions. Improved grooves and bead profile design offer better ride stability, endurance and handling performance.
2. Continuous tread blocks on both shoulder give great support to enhance the stability when cornering, the closed shoulders deliver excellent quiet ride.
3. Continuous solid center ribs and lateral tread blocks connected by ribin-chain enhance steering stability, decrease block deformation and reduce energy loss.
4. Special tread compound delivers excellent grip on both dry and wet roads and offer longer mileage.

Summer Tire

Sizes Description		Sidewall Description	Tread Depth		Standard Rim	Section Width(mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
			MM	1/32"								
195/45R15	82VXL	BLK	8.00	10.0	6.5	195	557	340/50	E	C	))	70
195/50R15	82V	BLK	8.00	10.0	6.0	201	577	300/44	E	C	))	70
195/55R15	85V	BLK	8.00	10.0	6.0	201	595	300/44	E	C	))	70
185/55R16	87VXL	BLK	8.00	10.0	6.0	194	610	340/50	E	C	))	70
195/45R16	84VXL	BLK	8.00	10.0	6.5	195	582	340/50	E	C	))	70
195/50R16	88VXL	BLK	8.00	10.0	6.0	201	602	340/50	E	C	))	70
195/55R16	91VXL	BLK	8.00	10.0	6.0	190	619	340/50	E	C	))	70
205/45R16	87WXL	BLK	8.00	10.0	7.0	206	590	340/50	E	C	))	70
205/50R16	91WXL	BLK	8.00	10.0	6.5	214	612	340/50	E	C	))	70
205/55R16	94WXL	BLK	8.00	10.0	6.5	214	632	340/50	E	C	))	70
215/55R16	97WXL	BLK	8.00	10.0	7.0	226	642	340/50	E	C	))	71
225/55R16	99WXL	BLK	8.00	10.0	7.0	233	680	340/50	E	C	))	71
205/40R17	84WXL	BLK	8.00	10.0	7.5	212	596	340/50	E	C	))	70
205/45R17	88WXL	BLK	8.00	10.0	7.0	206	616	340/50	E	C	))	70
205/50R17	93WXL	BLK	8.00	10.0	6.5	214	638	340/50	E	C	))	70
215/40R17	87WXL	BLK	8.00	10.0	7.5	218	604	340/50	E	C	))	71
215/45R17	91WXL	BLK	8.00	10.0	7.0	213	626	340/50	E	C	))	71
215/50R17	95WXL	BLK	8.00	10.0	7.5	226	648	340/50	E	C	))	71
215/55R17	98WXL	BLK	8.00	10.0	7.0	226	668	340/50	E	C	))	71
225/45R17	94WXL	BLK	8.00	10.0	7.5	225	634	340/50	E	C	))	71
225/50R17	98WXL	BLK	8.00	10.0	8.0	233	658	340/50	E	C	))	71
225/55R17	101WXL	BLK	8.00	10.0	7.0	233	680	340/50	E	C	))	71
235/45R17	97WXL	BLK	8.00	10.0	7.5	236	644	340/50	E	C	))	71
235/50R17	100WXL	BLK	8.00	10.0	7.5	245	668	340/50	E	C	))	71
235/55R17	103WXL	BLK	8.00	10.0	7.5	245	690	340/50	E	C	))	71
245/45R17	99WXL	BLK	8.00	10.0	8.0	243	652	340/50	E	C	))	72
215/35R18	84WXL	BLK	8.00	10.0	7.5	218	607	340/50	E	C	))	71
215/40R18	89WXL	BLK	8.00	10.0	7.5	218	629	340/50	E	C	))	71
225/40R18	92WXL	BLK	8.00	10.0	8.5	230	637	340/50	E	C	))	71
225/45R18	95WXL	BLK	8.00	10.0	7.5	225	659	340/50	E	C	))	71
235/40R18	95WXL	BLK	8.00	10.0	8.5	241	645	340/50	E	C	))	71
235/45R18	98WXL	BLK	8.00	10.0	8.0	240	667	340/50	E	C	))	71
235/50R18	101WXL	BLK	8.00	10.0	7.5	243	693	340/50	E	C	))	71
245/40R18	97WXL	BLK	8.00	10.0	8.5	248	653	340/50	E	C	))	72
245/45R18	100WXL	BLK	8.00	10.0	8.0	243	677	340/50	E	C	))	72
245/50R18	104WXL	BLK	8.00	10.0	7.5	252	704	340/50	E	C	))	72
255/35R18	97WXL	BLK	8.00	10.0	9.0	260	635	340/50	E	C	))	72
255/40R18	99WXL	BLK	8.00	10.0	9.0	263	661	340/50	E	C	))	72
255/45R18	103WXL	BLK	8.00	10.0	8.5	257	687	340/50	E	C	))	72
215/35R19	85WXL	BLK	8.00	10.0	7.5	221	633	340/50	E	C	))	71
225/35R19	88WXL	BLK	8.00	10.0	8.0	232	642	340/50	E	C	))	71
235/35R19	91WXL	BLK	8.00	10.0	8.5	241	647	340/50	E	C	))	71
245/35R19	93WXL	BLK	8.00	10.0	8.5	248	655	340/50	E	C	))	72
245/40R19	98WXL	BLK	8.00	10.0	8.5	251	679	340/50	E	C	))	72
255/40R19	100WXL	BLK	8.00	10.0	9.0	263	687	340/50	E	C	))	71
225/30R20	85WXL	BLK	8.00	10.0	8.0	229	644	340/50	E	C	))	71
225/35R20	93WXL	BLK	8.00	10.0	8.0	230	666	340/50	E	C	))	72
245/30R20	97WXL	BLK	8.00	10.0	8.5	247	657	340/50	E	C	))	72
245/35R20	95WXL	BLK	8.00	10.0	8.5	248	680	340/50	E	C	))	72
245/45R20	103WXL	BLK	8.00	10.0	8.0	243	728	340/50	E	C	))	72
255/35R20	97WXL	BLK	8.00	10.0	9.0	260	686	340/50	E	C	))	72
255/45R20	105WXL	BLK	8.00	10.0	8.5	255	738	340/50	E	C	))	72
275/30R20	97WXL	BLK	8.00	10.0	9.5	278	675	340/50	E	C	))	72
275/35R20	102WXL	BLK	8.00	10.0	9.5	278	701	340/50	E	C	))	72
235/30R22	90WXL	BLK	8.00	10.0	8.5	242	701	340/50	E	C	))	72
245/30R22	92WXL	BLK	8.00	10.0	8.5	247	708	340/50	E	C	))	72
255/30R22	95WXL	BLK	8.00	10.0	9.0	259	713	340/50	E	C	))	72
245/30R24	95WXL	BLK	8.00	10.0	8.5	248	758	340/50	E	C	))	72
255/30R24	97WXL	BLK	8.00	10.0	9.0	255	767	340/50	E	C	))	72
275/25R24	96WXL	BLK	8.00	10.0	10.0	277	751	340/50	E	C	))	72

VANTOUR

1. Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great traction on all kinds of road conditions.

2. Continuous tread patterns on shoulder and solid shoulder ribs provide responsive handling and even wear.

3. Variable pitch patterns and multi-knife-cut tread pattern reduce vibration to offer the comfort and quiet ride.

4. Reinforced structure and special abrasion-resistant tread compound deliver extra puncture resistance and load bearing capability with more mileage.

Commercial Tire

Sizes Description		Sidewall Description	Tread Depth		Standard Rim	Section Width(mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
			MM	1/32"								
175/65R14C	90/88T	BLK	8.00	10.0	5.0	170	588	375/54	E	C	))	70
165/70R14C	89/87T	BLK	8.00	10.0	5.0	177	584	375/54	E	C	))	70
185R14C	102/100R	BLK	8.50	10.8	5.5	188	650	450/65	E	C	))	71
195R14C	106/104R	BLK	8.50	10.8	5.5	198	666	450/65	E	C	))	71
185R15C	103/102R	BLK	8.50	10.8	5.5	188	674	450/65	E	C	))	71
195R15C	106/104R	BLK	8.50	10.8	5.5	198	693	450/65	E	C	))	71
195/70R15C	104/102R	BLK	9.00	11.4	6.0	201	655	450/65	E	C	))	71
205/70R15C	106/104R	BLK	9.00	11.4	6.0	209	669	450/65	E	C	))	71
215/70R15C	109/107R	BLK	9.50	11.8	6.5	221	683	450/65	E	C	))	72
225/70R15C	112/110R	BLK	9.50	11.8	6.5	228	697	450/65	E	C	))	72
175/75R16C	101/99R	BLK	9.00	11.4	5.0	175	668	475/69	E	C	))	71
185/75R16C	104/102R	BLK	9.00	11.4	5.0	184	684	475/69	E	C	))	71
195/60R16C	99/97T	BLK	9.00	11.4	6.0	201	640	475/69	E	C	))	71
195/65R16C	104/102R	BLK	9.00	11.4	6.0	201	660	475/69	E	C	))	71
195/75R16C	107/105R	BLK	9.00	11.4	5.5	196	698	475/69	E	C	))	71
205/65R16C	107/105R	BLK	9.00	11.4	6.0	209	672	475/69	E	C	))	71
205/75R16C	110/108R	BLK	9.00	11.4	5.5	203	714	475/69	E	C	))	71
215/60R16C	103/101T	BLK	9.50	11.8	6.5	221	664	475/69	E	C	))	72
215/65R16C	109/107R	BLK	9.50	11.8	6.5	221	686	475/69	E	C	))	72
215/75R16C	113/111R	BLK	9.50	11.8	6.0	216	728	475/69	E	C	))	72
225/65R16C	112/110R	BLK	9.50	11.8	6.5	228	698	475/69	E	C	))	72
235/65R16C	115/113R	BLK	9.50	11.8	7.0	240	712	475/69	E	C	))	72

VANMARCH

1. Reinforced structure and special abrasionresistant tread compound deliver extrapuncture resistance and load bearing capability with more mileage.
2. Continuous tread patterns on shoulder and solid shoulder ribs responsive handling and even wear.
3. Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great tanction on all kids of road conditions.
4. White sidewall rib shows extraordinary appearance.

Commercial Tire

Sizes Description		Sidewall Description	Tread Depth		Standard Rim	Section Width(mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
			MM	1/32"								
155R13C	90/88R	WSW	8.00	10.0	157	578	4.5	450/65	-	-	-	-
185R14C	102/100R	WSW	8.50	10.8	188	650	5.5	450/65	-	-	-	-
195R14C	106/104R	WSW	8.50	10.8	198	666	5.5	450/65	-	-	-	-
205/75R14C	109/107R	WSW	8.50	10.8	203	664	5.5	475/69	-	-	-	-
185R15C	103/102R	WSW	8.50	10.8	188	674	5.5	450/65	-	-	-	-
195R15C	106/104R	WSW	8.50	10.8	198	693	5.5	450/65	-	-	-	-
205/75R15C	109/107R	WSW	8.50	10.8	203	689	5.5	475/69	-	-	-	-

CITYRACING

UTQG: 300 A A

1. Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.
2. Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage.
3. Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.
4. Special tread compound delivers excellent grip on both dry and wet roads and reduce the rolling resistance to save oil and protect environment.

Summer Tire

Sizes Description		Sidewall Description	Tread Depth		Standard Rim	Section Width(mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
			MM	1/32"								
195/45R15	82VXL	BLK	8.00	10.0	6.5	195	557	340/50	E	C	))	70
195/50R15	82V	BLK	8.00	10.0	6.0	201	577	300/44	E	C	))	70
195/55R15	85V	BLK	8.00	10.0	6.0	201	595	300/44	E	C	))	70
185/55R16	87VXL	BLK	8.00	10.0	6.0	194	610	340/50	E	C	))	70
195/45R16	84VXL	BLK	8.00	10.0	6.5	195	582	340/50	E	C	))	70
195/50R16	88VXL	BLK	8.00	10.0	6.0	201	602	340/50	E	C	))	70
195/55R16	91VXL	BLK	8.00	10.0	6.0	190	619	340/50	E	C	))	70
205/45R16	87WXL	BLK	8.00	10.0	7.0	206	590	340/50	E	C	))	70
205/50R16	91WXL	BLK	8.00	10.0	6.5	214	612	340/50	E	C	))	70
205/55R16	94WXL	BLK	8.00	10.0	6.5	214	632	340/50	E	C	))	70
215/55R16	97WXL	BLK	8.00	10.0	7.0	226	642	340/50	E	C	))	71
225/55R16	99WXL	BLK	8.00	10.0	7.0	233	680	340/50	E	C	))	71
205/40R17	84WXL	BLK	8.00	10.0	7.5	212	596	340/50	E	C	))	70
205/45R17	88WXL	BLK	8.00	10.0	7.0	206	616	340/50	E	C	))	70
205/50R17	93WXL	BLK	8.00	10.0	6.5	214	638	340/50	E	C	))	70
215/40R17	87WXL	BLK	8.00	10.0	7.5	218	604	340/50	E	C	))	71
215/45R17	91WXL	BLK	8.00	10.0	7.0	213	626	340/50	E	C	))	71
215/50R17	95WXL	BLK	8.00	10.0	7.5	226	648	340/50	E	C	))	71
215/55R17	98WXL	BLK	8.00	10.0	7.0	226	668	340/50	E	C	))	71
225/45R17	94WXL	BLK	8.00	10.0	7.5	225	634	340/50	E	C	))	71
225/50R17	98WXL	BLK	8.00	10.0	8.0	233	658	340/50	E	C	))	71
225/55R17	101WXL	BLK	8.00	10.0	7.0	233	680	340/50	E	C	))	71
235/45R17	97WXL	BLK	8.00	10.0	7.5	236	644	340/50	E	C	))	71
235/50R17	100WXL	BLK	8.00	10.0	7.5	245	668	340/50	E	C	))	71
235/55R17	103WXL	BLK	8.00	10.0	7.5	245	690	340/50	E	C	))	71
245/45R17	99WXL	BLK	8.00	10.0	8.0	243	652	340/50	E	C	))	72
215/35R18	84WXL	BLK	8.00	10.0	7.5	218	607	340/50	E	C	))	71
215/40R18	89WXL	BLK	8.00	10.0	7.5	218	629	340/50	E	C	))	71
225/40R18	92WXL	BLK	8.00	10.0	8.5	230	637	340/50	E	C	))	71
225/45R18	95WXL	BLK	8.00	10.0	7.5	225	659	340/50	E	C	))	71
235/40R18	95WXL	BLK	8.00	10.0	8.5	241	645	340/50	E	C	))	71
235/45R18	98WXL	BLK	8.00	10.0	8.0	240	667	340/50	E	C	))	71
235/50R18	101WXL	BLK	8.00	10.0	7.5	243	693	340/50	E	C	))	71
245/40R18	97WXL	BLK	8.00	10.0	8.5	248	653	340/50	E	C	))	72
245/45R18	100WXL	BLK	8.00	10.0	8.0	243	677	340/50	E	C	))	72
245/50R18	104WXL	BLK	8.00	10.0	7.5	252	704	340/50	E	C	))	72
255/35R18	97WXL	BLK	8.00	10.0	9.0	260	635	340/50	E	C	))	72
255/40R18	99WXL	BLK	8.00	10.0	9.0	263	661	340/50	E	C	))	72
255/45R18	103WXL	BLK	8.00	10.0	8.5	257	687	340/50	E	C	))	72
215/35R19	85WXL	BLK	8.00	10.0	7.5	221	633	340/50	E	C	))	71
225/35R19	88WXL	BLK	8.00	10.0	8.0	232	642	340/50	E	C	))	71
235/35R19	91WXL	BLK	8.00	10.0	8.5	241	647	340/50	E	C	))	71
245/35R19	93WXL	BLK	8.00	10.0	8.5	248	655	340/50	E	C	))	72
245/40R19	98WXL	BLK	8.00	10.0	8.5	251	679	340/50	E	C	))	72
255/40R19	100WXL	BLK	8.00	10.0	9.0	263	687	340/50	E	C	))	71
225/30R20	85WXL	BLK	8.00	10.0	8.0	229	644	340/50	E	C	))	71
225/35R20	93WXL	BLK	8.00	10.0	8.0	230	666	340/50	E	C	))	72
245/30R20	97WXL	BLK	8.00	10.0	8.5	247	657	340/50	E	C	))	72
245/35R20	95WXL	BLK	8.00	10.0	8.5	248	680	340/50	E	C	))	72
245/45R20	103WXL	BLK	8.00	10.0	8.0	243	728	340/50	E	C	))	72
255/35R20	97WXL	BLK	8.00	10.0	9.0	260	686	340/50	E	C	))	72
255/45R20	105WXL	BLK	8.00	10.0	8.5	255	738	340/50	E	C	))	72
275/30R20	97WXL	BLK	8.00	10.0	9.5	278	675	340/50	E	C	))	72
275/35R20	102WXL	BLK	8.00	10.0	9.5	278	701	340/50	E	C	))	72
235/30R22	90WXL	BLK	8.00	10.0	8.5	242	701	340/50	E	C	))	72
245/30R22	92WXL	BLK	8.00	10.0	8.5	247	708	340/50	E	C	))	72
255/30R22	95WXL	BLK	8.00	10.0	9.0	259	713	340/50	E	C	))	72
245/30R24	95WXL	BLK	8.00	10.0	8.5	248	758	340/50	E	C	))	72
255/30R24	97WXL	BLK	8.00	10.0	9.0	255	767	340/50	E	C	))	72
275/25R24	96WXL	BLK	8.00	10.0	10.0	277	751	340/50	E	C	))	72

CITYRACING

UTQG: 420 A A

- Comfort
- High Performance
- Drainage
- Silence

1. Four wide circumferential tread grooves and lateral grooves with finesipes provide efficient water evacuation, outstanding wet performance.
2. Continuous block patterns on shoulder enhance the ride stability at highspeed cornering. The rim protector will protect wheels from curb damage.
3. Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.
4. Special tread compound delivers excellent grip on both dry and wet roads and reduce the rolling resistance to save oil and protect environment.

Summer Tire

Sizes Description		Sidewall Description	Tread Depth		Standard Rim	Section Width(mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
			MM	1/32"								
235/65R17	108HXL	BLK	8.50	10.8	7.0	240	738	340/50	E	C	))	71
245/65R17	107H	BLK	8.50	10.8	7.0	248	750	300/44	E	C	))	72
255/60R17	110VXL	BLK	8.50	10.8	7.5	260	738	340/50	E	C	))	72
255/65R17	110H	BLK	8.50	10.8	7.5	260	764	300/44	E	C	))	72
265/65R17	112H	BLK	8.50	10.8	8.0	272	776	300/44	E	C	))	72
255/55R18	109VXL	BLK	8.50	10.8	8.0	265	737	340/50	E	C	))	72
255/60R18	112VXL	BLK	8.50	10.8	7.5	257	763	340/50	E	C	))	72
235/55R19	105VXL	BLK	8.50	10.8	7.5	245	741	340/50	E	C	))	71
245/55R19	107VXL	BLK	8.50	10.8	7.5	253	753	340/50	E	C	))	72
255/50R19	107VXL	BLK	8.50	10.8	8.0	265	738	340/50	E	C	))	72
255/55R19	111VXL	BLK	8.50	10.8	8.0	265	763	340/50	E	C	))	72
265/50R20	111VXL	BLK	8.50	10.8	9.0	277	774	340/50	E	C	))	72
275/40R20	106VXL	BLK	8.50	10.8	9.5	278	728	340/50	E	C	))	72
275/45R20	110VXL	BLK	8.50	10.8	9.0	273	756	340/50	E	C	))	72
275/55R20	117VXL	BLK	8.50	10.8	8.5	284	810	340/50	E	C	))	72
275/60R20	119VXL	BLK	8.50	10.8	8.0	279	838	340/50	E	C	))	72
285/50R20	116VXL	BLK	8.50	10.8	9.0	297	794	340/50	E	C	))	72
295/35R21	107WXL	BLK	8.50	10.8	10.5	301	739	340/50	E	C	))	72
295/40R21	111WXL	BLK	8.50	10.8	10.5	301	769	340/50	E	C	))	72
265/35R22	102VXL	BLK	8.50	10.8	9.5	271	745	340/50	E	C	))	72
265/40R22	106VXL	BLK	8.50	10.8	9.5	271	771	340/50	E	C	))	72
285/35R22	106VXL	BLK	8.50	10.8	10.0	290	759	340/50	E	C	))	72
305/40R22	114VXL	BLK	8.50	10.8	11.0	313	803	340/50	E	C	))	72
305/45R22	118VXL	BLK	8.50	10.8	10.0	303	833	340/50	E	C	))	72
295/35R24	110VXL	BLK	8.50	10.8	10.5	301	816	340/50	E	C	))	72
305/35R24	112VXL	BLK	8.50	10.8	11.0	313	824	340/50	E	C	))	72
295/30R26	107VXL	BLK	8.50	10.8	10.5	301	839	340/50	E	C	))	72
305/30R26	109VXL	BLK	8.50	10.8	11.0	313	844	340/50	E	C	))	72

ROADMARCH

UTQG:420 A B

1. Four main groovs provide good driving stability and wet performance.
2. Reasonable pattern area, pertect collocation of every grooves.
3. Special tread compound, ensure tire performance stability in all kinds of weather conditions.
4. White sidewall rib shows extraordinary appearance.

Commercial Tire

Sizes Description		Sidewall Description	Tread Depth		Standard Rim	Section Width(mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
			MM	1/32"								
P185/75R14	89S	WSW	8.50	10.8	5.0	184	634	300/44	-	-	-	-
P195/75R14	92S	WSW	8.50	10.8	5.0	196	648	300/44	-	-	-	-
P205/75R14	95S	WSW	8.50	10.8	5.5	203	664	300/44	-	-	-	-
P205/70R15	95S	WSW	8.50	10.8	6.0	209	669	300/44	-	-	-	-
P205/75R15	97T	WSW	8.50	10.8	5.5	203	689	300/44	-	-	-	-
P215/70R15	98T	WSW	8.50	10.8	6.5	221	683	300/44	-	-	-	-
P215/75R15	100T	WSW	8.50	10.8	6.0	216	703	300/44	-	-	-	-
P225/70R15	100T	WSW	8.50	10.8	6.5	228	697	300/44	-	-	-	-
P225/75R15	102T	WSW	8.50	10.8	6.0	223	719	300/44	-	-	-	-
P235/75R15	105S	WSW	8.50	10.8	6.5	235	733	300/44	-	-	-	-

CITYROVER

UTQG:420 A A

1. Four wide circumferential tread grooves deliver the ride stability and offer excellent performance on wet conditions. Improved grooves and bead profile design offer better ride stability, endurance and handling performance.

2. The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation.Continuous tread blocks on both shoulder give great support to enhance the ride stability when cornering.

3. Variable pitch pattern and solid center ribs improve the ride stability, reduce the noise and deliver a comfortable ride.

4. High-density sipes with special compound deliver a smooth ride and improve traction on dry and wet roads. Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability.

Commercial Tire

Sizes Description		Sidewall Description	Tread Depth		Standard Rim	Section Width(mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
			MM	1/32"								
235/70R16	106H	BLK	8.50	10.8	7.0	240	736	300/44	E	))	C	71
245/70R16	107H	BLK	8.50	10.8	7.0	248	750	300/44	E	))	C	71
245/70R16	111HXL	BLK	8.50	10.8	7.0	248	750	340/50	E	))	C	71
255/65R16	109H	BLK	8.50	10.8	7.5	262	737	300/44	E	))	C	71
255/70R16	111H	BLK	8.50	10.8	7.5	260	764	300/44	E	))	C	71
265/70R16	112H	BLK	8.50	10.8	8.0	272	778	300/44	E	))	C	71
275/70R16	114H	BLK	8.50	10.8	8.0	279	792	300/44	E	))	C	72
215/60R17	96H	BLK	8.50	10.8	6.5	221	680	300/44	E	))	C	71
215/65R17	99H	BLK	8.50	10.8	6.5	221	710	300/44	E	))	C	71
225/60R17	99H	BLK	8.50	10.8	6.5	228	702	300/44	E	))	C	71
225/65R17	102H	BLK	8.50	10.8	6.5	228	724	300/44	E	))	C	71
235/60R17	102H	BLK	8.50	10.8	7.0	240	714	300/44	E	))	C	71
235/60R17	106HXL	BLK	8.50	10.8	7.0	240	714	340/50	E	))	C	71
235/65R17	104H	BLK	8.50	10.8	7.0	240	738	300/44	E	))	C	71
235/65R17	108HXL	BLK	8.50	10.8	7.0	240	738	300/44	E	))	C	71
245/65R17	107H	BLK	8.50	10.8	7.0	248	750	340/50	E	))	C	71
245/65R17	111HXL	BLK	8.50	10.8	7.0	248	750	300/44	E	))	C	71
255/65R17	110H	BLK	8.50	10.8	7.5	260	764	300/44	E	))	C	71
265/65R17	112H	BLK	8.50	10.8	8.0	272	776	300/44	E	))	C	71
265/70R17	115H	BLK	8.50	10.8	8.0	272	804	300/44	E	))	C	71
275/65R17	115H	BLK	8.50	10.8	8.0	279	791	300/44	E	))	C	72
285/65R17	116H	BLK	8.50	10.8	8.5	292	802	300/44	E	))	C	72
225/55R18	98H	BLK	8.50	10.8	7.0	233	705	300/44	E	))	C	71
225/60R18	100H	BLK	8.50	10.8	6.5	228	727	340/50	E	))	C	71
235/55R18	104HXL	BLK	8.50	10.8	7.5	245	715	340/50	E	))	C	71
235/60R18	107HXL	BLK	8.50	10.8	7.0	240	739	300/44	E	))	C	71
265/60R18	110H	BLK	8.50	10.8	8.0	272	775	300/44	E	))	C	71
285/60R18	116H	BLK	8.50	10.8	8.5	290	802	300/44	E	))	C	72

POWER LANDER A/T

UTQG:480 A B

1. Four main zigzag grooves and rough lateral blocks provide excellent traction on all kinds of road conditions.

2. The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. The white letter styling provide a artistic image.

3. The block tread design with multiple-sipes provide outstanding off-road traction and reduce tread damage on off-road condition.

4. Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.

Commercial Tire

Sizes Description		Sidewall Description	Tread Depth		Standard Rim	Section Width(mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				
			MM	1/32"								dB
P235/75R15	105S	OWL	9.00	11.4	6.5	235	733	300/44	-	-	-	-
P235/75R15	109SXL	OWL	9.00	11.4	6.5	235	733	340/50	-	-	-	-
P215/70R16	99T/100T	RBL	9.00	11.4	6.5	221	768	300/44	-	-	-	-
P225/70R16	101T/103T	OWL	9.00	11.4	6.5	228	722	300/44	-	-	-	-
P235/70R16	104T/106T	OWL	9.00	11.4	7.0	240	736	300/44	-	-	-	-
P245/70R16	106T/107T	OWL	9.00	11.4	7.0	248	750	300/44	-	-	-	-
P245/75R16	109T/111T	OWL	9.00	11.4	7.0	248	774	300/44	-	-	-	-
P255/70R16	109T/111T	OWL	9.50	12.0	7.5	260	764	300/44	-	-	-	-
P265/70R16	111T/112T	OWL	9.50	12.0	8.0	272	778	300/44	-	-	-	-
P275/70R16	114T	OWL	9.50	12.0	8.0	279	792	300/44	-	-	-	-
P225/65R17	100T/102T	OWL	9.00	11.4	6.5	228	724	300/44	-	-	-	-
P235/65R17	103T/104T	OWL	9.00	11.4	7.0	240	738	300/44	-	-	-	-
P245/65R17	105T/107T	OWL	9.00	11.4	7.0	248	750	300/44	-	-	-	-
P245/70R17	108T/110T	OWL	9.00	11.4	7.0	248	776	300/44	-	-	-	-
P255/65R17	108T/110T	OWL	9.50	12.0	7.5	259	762	300/44	-	-	-	-
P265/65R17	110T/112T	OWL	9.50	12.0	7.0	272	776	300/44	-	-	-	-
P265/70R17	113T/115T	OWL	9.50	12.0	8.0	272	804	300/44	-	-	-	-
P275/65R17	115T	OWL	9.50	12.0	8.0	279	791	300/44	-	-	-	-
P275/65R18	114T/116T	OWL	9.50	12.0	8.0	279	818	300/44	-	-	-	-
P285/60R18	116T/120T	OWL	9.50	12.0	8.5	292	795	300/44	-	-	-	-
P275/55R20	111T/113T	OWL	9.50	12.0	8.5	284	810	300/44	-	-	-	-
P275/60R20	114T/115T	OWL	9.50	12.0	8.0	279	836	300/44	-	-	-	-
P305/40R22	114T	OWL	10.00	12.6	11.0	310	803	300/44	-	-	-	-
P305/45R22	118T	OWL	10.00	12.6	10.0	302	828	300/44	-	-	-	-
LT235/75R15	C 104/101S	OWL	11.50	14.4	6.5	233	733	350/51	-	-	-	-
LT31X10.50R15	C 109S	OWL	11.50	14.4	8.5	268	775	350/51	-	-	-	-
215R15C	C 109/107S	RBL	11.50	14.4	6.0	218	724	375/55	-	-	-	-
245/75R15C	C 107/105S	RBL	11.50	14.4	7.0	248	749	375/55	-	-	-	-
LT215/85R16	E 115/112S	OWL	11.50	14.4	6.0	216	772	550/80	-	-	-	-
LT225/75R16	E 115/112S	OWL	11.50	14.4	6.0	223	744	550/80	-	-	-	-
LT235/85R16	E 120/116S	RBL	12.00	15.0	6.5	235	806	550/80	-	-	-	-
LT245/75R16	E 120/116S	OWL	11.50	14.4	7.0	248	774	550/80	-	-	-	-
LT265/75R16	E 123/120S	OWL	12.00	15.0	7.5	267	804	550/80	-	-	-	-
LT285/75R16	D 122/119S	OWL	12.00	15.0	8.0	286	834	450/65	-	-	-	-
205R16C	C 110/108R	OWL	11.50	14.4	5.5	200	738	375/55	-	-	-	-
185/75R16C	D 104/102R	RBL	9.00	11.4	5.0	184	684	475/69	-	-	-	-
LT245/75R17	E 121/118S	OWL	12.00	15.0	7.0	248	800	550/80	-	-	-	-
LT265/70R17	E 121/118S	OWL	12.00	15.0	8.0	272	804	550/80	-	-	-	-
LT285/70R17	D 121/118S	OWL	12.00	15.0	8.5	284	831	450/65	-	-	-	-
LT275/65R18	E 123/120S	OWL	12.00	15.0	8.0	279	813	550/80	-	-	-	-
LT285/65R18	E 125/122S	OWL	12.00	15.0	8.5	290	826	550/80	-	-	-	-
LT275/65R20	E 126/123S	OWL	12.00	15.0	8.0	279	864	550/80	-	-	-	-
LT305/55R20	E 121/118S	OWL	12.00	15.0	9.5	315	843	550/80	-	-	-	-

POWER ROVER M/T

1. Three main zigzag grooves and aggressive pattern design provide outstanding traction on all kinds of road conditions.

2. High void ratio and open shoulder offer excellent resistance to aquaplaning and self-cleaning performance.

3. The block tread design with multiple-sipes provide outstanding offroad traction and reduce tread damage on off-road condition. Special casing profile and solid shoulder pattern enhance the max traction and cornering performance.

4. Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.



Commercial Tire

Sizes Description		Sidewall Description	Tread Depth		Standard Rim	Section Width(mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				
			MM	1/32''								
LT31X10.50R15	C 109Q	RBL	13.50	16.8	8.5	268	775	350/51	-	-	-	-
LT33X12.50R15	C 108Q	RBL	13.50	16.8	10.0	320	838	350/51	-	-	-	-
LT35X12.50R15	C 113Q	RBL	14.50	18.2	10.0	326	890	350/51	-	-	-	-
LT235/85R16	E 120/116Q	RBL	13.50	16.8	6.5	235	806	550/80	-	-	-	-
LT245/75R16	E 120/116Q	RBL	13.50	16.8	7.0	248	771	550/80	-	-	-	-
LT265/75R16	E 123/120Q	RBL	13.50	16.8	7.5	267	804	550/80	-	-	-	-
LT285/75R16	E 126/123Q	RBL	13.50	16.8	8.0	286	834	550/80	-	-	-	-
LT305/70R16	E 124/121Q	RBL	14.50	18.2	9.0	310	838	550/80	-	-	-	-
LT315/75R16	E 127/124Q	RBL	14.50	18.2	8.5	326	886	550/80	-	-	-	-
LT265/70R17	E 121/118Q	RBL	13.50	16.8	8.0	272	804	550/80	-	-	-	-
LT285/70R17	E 126/123Q	RBL	13.50	16.8	8.5	284	831	550/80	-	-	-	-
LT35X12.50R17	E 125Q	RBL	14.50	18.2	10.0	326	890	450/65	-	-	-	-
LT37X13.50R17	E 131Q	RBL	14.50	18.2	11.0	352	940	450/65	-	-	-	-
LT33X12.50R18	E 118Q	RBL	13.50	16.8	10.0	320	838	450/65	-	-	-	-
LT35X12.50R18	E 123Q	RBL	14.50	18.2	10.0	326	890	450/65	-	-	-	-
LT37X13.50R18	E 129Q	RBL	14.50	18.2	11.0	352	940	450/65	-	-	-	-
LT33X12.50R20	E 114Q	RBL	13.50	16.8	10.0	320	838	450/65	-	-	-	-
LT35X12.50R20	E 121Q	RBL	14.50	18.2	10.0	326	890	450/65	-	-	-	-
LT37X13.50R20	E 127Q	RBL	14.50	18.2	11.0	352	940	450/65	-	-	-	-
LT33X12.50R22	E 109Q	RBL	13.50	16.8	10.0	320	838	450/65	-	-	-	-
LT35X12.50R22	E 117Q	RBL	14.50	18.2	10.0	326	890	450/65	-	-	-	-
LT37X13.50R22	E 123Q	RBL	14.50	18.2	11.0	352	940	450/65	-	-	-	-

SNOWSTAR

1. Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.The optimized deployment of "Z" shape sipes, provide great grip on snow & ice conditions.

2. Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage

3. Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.

4. Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.

Commercial Tire

Sizes Description		Sidewall Description	Tread Depth		Standard Rim	Section Width(mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				dB
			MM	1/32"								
195/50R15	82H	BLK	8.50	10.8	6.0	201	577	300/44	-	-	-	-
195/55R15	85H	BLK	8.50	10.8	6.0	201	595	300/44	-	-	-	-
195/60R15	88H	BLK	8.50	10.8	6.0	201	615	300/44	-	-	-	-
195/65R15	91H	BLK	8.50	10.8	6.0	201	635	300/44	-	-	-	-
195/55R16	91HXL	BLK	8.50	10.8	6.0	190	619	340/50	-	-	-	-
205/55R16	94HXL	BLK	8.50	10.8	6.5	214	632	340/50	-	-	-	-
215/55R16	97HXL	BLK	8.50	10.8	7.0	226	642	340/50	-	-	-	-
225/55R16	99HXL	BLK	8.50	10.8	7.0	233	680	340/50	-	-	-	-
205/45R17	88HXL	BLK	8.50	10.8	7.0	206	616	340/50	-	-	-	-
205/50R17	93HXL	BLK	8.50	10.8	6.5	214	638	340/50	-	-	-	-
215/45R17	91HXL	BLK	8.50	10.8	7.0	213	626	340/50	-	-	-	-
215/50R17	95HXL	BLK	8.50	10.8	7.5	245	719	340/50	-	-	-	-
215/55R17	98HXL	BLK	8.50	10.8	7.0	226	668	340/50	-	-	-	-
225/45R17	94HXL	BLK	8.50	10.8	7.5	225	634	340/50	-	-	-	-
225/50R17	98HXL	BLK	8.50	10.8	8.0	265	739	340/50	-	-	-	-
225/55R17	101HXL	BLK	8.50	10.8	7.0	233	680	340/50	-	-	-	-
235/45R17	97HXL	BLK	8.50	10.8	7.5	236	644	340/50	-	-	-	-
235/55R17	103HXL	BLK	8.50	10.8	7.5	245	690	340/50	-	-	-	-
225/40R18	92HXL	BLK	8.50	10.8	8.5	234	637	340/50	-	-	-	-
235/40R18	95HXL	BLK	8.50	10.8	8.5	241	645	340/50	-	-	-	-
245/45R18	100HXL	BLK	8.50	10.8	8.0	243	677	340/50	-	-	-	-
255/55R18	109HXL	BLK	8.50	10.8	8.0	265	737	340/50	-	-	-	-

SNOWTOUR

1. Central straight & 2 wide Zig-Zag circumferential grooves, with the design of convexes in the bottom, improve the traction, shorten braking distance and increase the stability on the snow road.

2. Wide rolling tread, by using computer-optimized design, make sure enough contact area for more grip. The wide open shoulder grooves prevent aquaplaning with enhanced wet grip and provide excellent water & snow evacuation.

3. Bionic tread pattern design makes rge whole tread blocks' stiffness more logocal, with the optimized deployment of "Z" shape sipes, provide great grip on snow & ice conditions.

4. Special tread compound remains flexible at lower temperatures to make sure the grip on winter road conditions, while reduce the rolling resistance.

Commercial Tire

Sizes Description		Sidewall Description	Tread Depth		Standard Rim	Section Width(mm)	OA. Diameter (mm)	Max. Pressure (kpa/PSI)				
			MM	1/32"								dB
165/70R13	79T	BLK	8.00	10.0	5.0	170	562	300/44	-	-	-	-
175/70R13	82T	BLK	8.00	10.0	5.0	177	576	300/44	-	-	-	-
155/65R14	75T	BLK	8.00	10.0	4.5	154	557	300/44	-	-	-	-
165/60R14	75T	BLK	8.00	10.0	5.0	170	554	300/44	-	-	-	-
165/65R14	79T	BLK	8.00	10.0	5.0	170	570	300/44	-	-	-	-
165/70R14	85TXL	BLK	8.00	10.0	5.0	170	588	340/50	-	-	-	-
175/65R14	82T	BLK	8.00	10.0	5.0	177	584	300/44	-	-	-	-
175/70R14	88TXL	BLK	8.00	10.0	5.0	177	602	340/50	-	-	-	-
185/60R14	82T	BLK	8.00	10.0	5.5	189	578	300/44	-	-	-	-
185/65R14	86T	BLK	8.00	10.0	5.5	189	609	300/44	-	-	-	-
185/70R14	92TXL	BLK	8.00	10.0	5.5	189	616	340/50	-	-	-	-
195/70R14	95TXL	BLK	8.00	10.0	6.0	201	630	340/50	-	-	-	-
175/65R15	84H	BLK	8.00	10.0	5.0	177	609	300/44	-	-	-	-
185/55R15	86HXL	BLK	8.00	10.0	6.0	194	585	300/44	-	-	-	-
185/60R15	88HXL	BLK	8.00	10.0	5.5	189	603	340/50	-	-	-	-
185/65R15	88H	BLK	8.00	10.0	5.5	189	621	300/44	-	-	-	-
195/60R15	88H	BLK	8.50	10.8	6.0	201	615	300/44	-	-	-	-
195/65R15	95TXL	BLK	8.50	10.8	6.0	201	635	340/50	-	-	-	-
205/60R15	91H	BLK	8.50	10.8	6.0	209	627	300/44	-	-	-	-
205/65R15	94H	BLK	8.50	10.8	6.0	209	647	300/44	-	-	-	-
205/70R15	96T	BLK	8.50	10.8	6.0	209	669	300/44	-	-	-	-
215/70R15	98T	BLK	8.50	10.8	6.5	221	683	300/44	-	-	-	-
205/55R16	91H	BLK	8.50	10.8	6.5	214	632	300/44	-	-	-	-
205/60R16	96HXL	BLK	8.50	10.8	6.0	209	652	340/50	-	-	-	-
215/60R16	99HXL	BLK	8.50	10.8	6.5	221	664	340/50	-	-	-	-
215/65R16	98H	BLK	8.50	10.8	6.5	221	686	300/44	-	-	-	-
215/70R16	100T	BLK	8.50	10.8	6.5	217	708	300/44	-	-	-	-
225/60R16	98H	BLK	8.50	10.8	6.5	228	676	300/44	-	-	-	-
225/70R16	107TXL	BLK	8.50	10.8	6.5	228	722	300/44	-	-	-	-
235/70R16	106T	BLK	9.00	11.4	7.0	240	736	300/44	-	-	-	-
245/70R16	111TXL	BLK	9.00	11.4	7.0	248	750	340/50	-	-	-	-
265/70R16	112T	BLK	9.00	11.4	8.0	272	778	300/44	-	-	-	-
215/60R17	96H	BLK	9.00	11.4	6.5	221	690	300/44	-	-	-	-
215/65R17	99H	BLK	9.00	11.4	6.5	221	710	300/44	-	-	-	-
225/60R17	99H	BLK	9.00	11.4	6.5	228	702	300/44	-	-	-	-
225/65R17	102T	BLK	9.00	11.4	6.5	228	724	300/44	-	-	-	-
235/65R17	108TXL	BLK	9.00	11.4	7.0	240	738	340/50	-	-	-	-
245/65R17	111TXL	BLK	9.00	11.4	7.0	248	750	340/50	-	-	-	-
265/65R17	112T	BLK	9.00	11.4	8.0	272	776	300/44	-	-	-	-
265/70R17	115T	BLK	9.00	11.4	8.0	272	804	300/44	-	-	-	-
LT225/75R16	115/112S	BLK	11.5	14.4	6.0	223	744	550/80	-	-	-	-
LT245/75R16	120/116S	BLK	11.5	14.4	7.0	248	774	550/80	-	-	-	-
195/70R15C	104/102R	BLK	9.50	12.0	6.0	201	655	450/65	-	-	-	-
215/70R15C	109/107R	BLK	10.00	12.6	6.5	221	683	450/65	-	-	-	-
225/70R15C	112/110R	BLK	10.00	12.6	6.5	228	697	450/65	-	-	-	-
185/75R16C	104/102R	BLK	9.50	12.0	5.0	184	684	475/69	-	-	-	-
195/65R16C	104/102R	BLK	9.50	12.0	6.0	201	660	475/69	-	-	-	-
195/75R16C	107/105R	BLK	9.50	12.0	5.5	196	698	475/69	-	-	-	-
205/65R16C	107/105R	BLK	9.50	12.0	6.0	209	672	475/69	-	-	-	-
215/65R16C	109/107R	BLK	10.00	12.6	6.5	221	686	475/69	-	-	-	-
225/65R16C	112/110R	BLK	10.00	12.6	6.5	228	698	475/69	-	-	-	-
235/65R16C	115/113R	BLK	10.00	12.6	7.0	240	712	475/69	-	-	-	-

Technical File

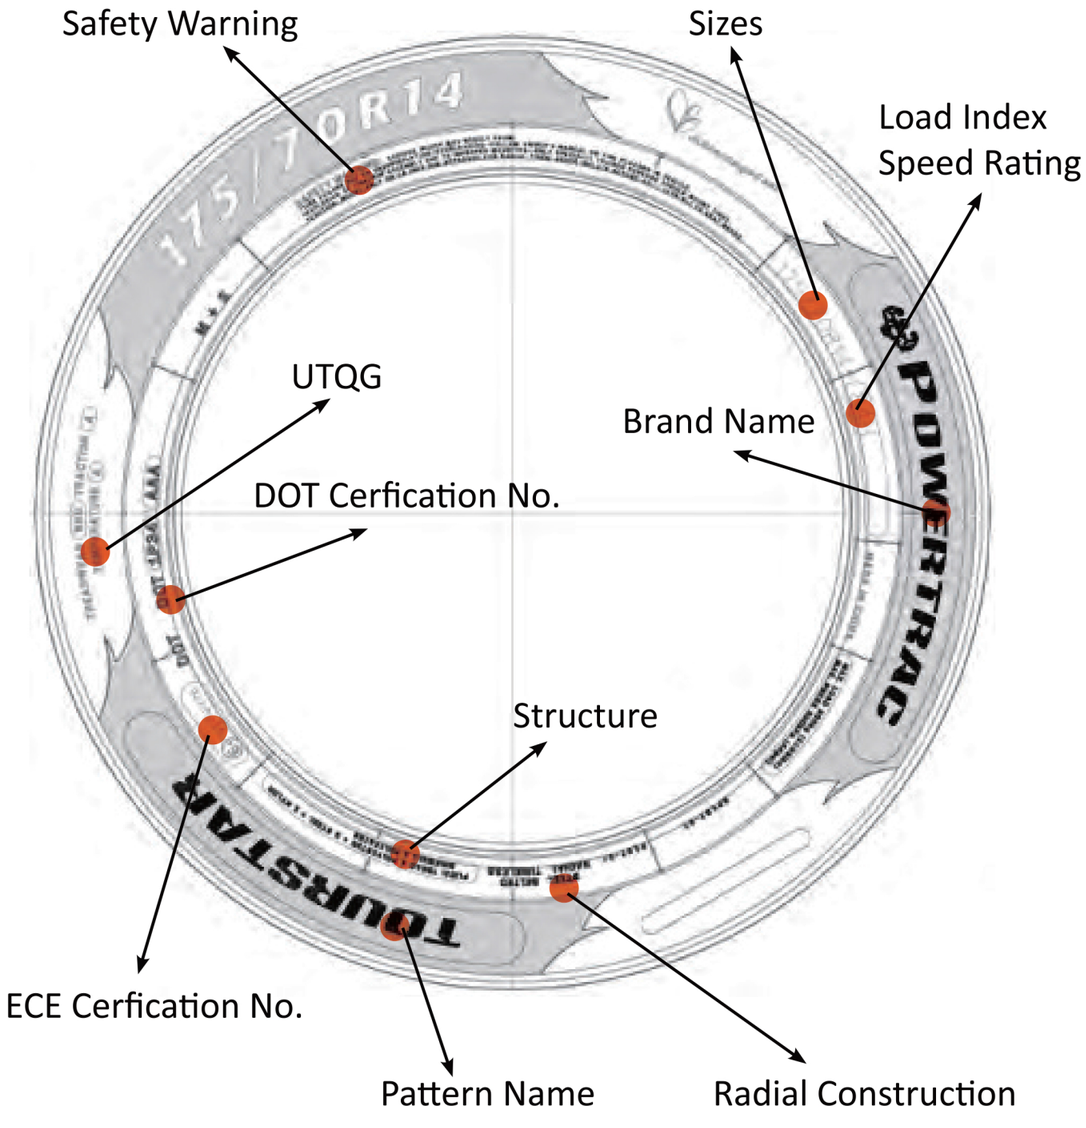

Limited Warranty

Shandong Haohua Tire Co., Ltd. is located at Binhai National Economic Development Zone, Weifang, Shandong – the beautiful national Circum-Bohai-Sea blue economic area. POWERTRAC Tyre Co.,Ltd. belongs to Shandong Haohua Tire Co., Ltd as a sales company focusing on selling POWERTRAC brand.

1. WHO IS COVERED BY THIS LIMITED WARRANTY?

(1). You are the authorized distributors from Shandong Haohua Tire.
(2). Your tires bear the Department of Transportation prescribed tires identification numbers and are not branded “NA”(Not Adjustable) or “Blem” (Blemish), and
(3). Your tires have been used only on the vehicle on which they were originally installed according to the vehicle manufacturer's or tire manufacture's recommendations, and your tires were purchased within 3 years.

2. WHAT IS COVERED AND FOR HOW LONG?

Shandong Haohua Tire warrants that if a tire becomes unserviceable due to an eligible adjustable conditions during the tread life (defined below) within 3 years from the original date of manufacture. The tire will be replaced by an equivalent new tire.A replacement charge may be required in order to obtain a replacement tire (as defined below).Or, a credit can be granted based on tread remaining.

3. REPLACEMENT CHARGE?

For tires being removed from service due to a defect in manufacture's workmanship or materials, but not within the first 2/32" wear, the replacement price will be calculated by multiplying the current selling price(or sale price if original invoice is available) by the percentage of original tread depth that has been worn from tire.

4. WHAT IS NOT COVERED?

This warranty does not cover tires that become unserviceable due to cuts, snag or punctures.

1. Conditions resulting from road hazards, such as impact damage, cuts, snag or punctures.
2. Conditions resulting from improper installation, wheel misalignment, or tire/wheel assembly imbalance.
3. Conditions or irregular wear resulting from consumer damage, such as improper tire and vehicle maintenance,misuse, abuse or accident.
4. Tires which have been repaired, retreaded, or reclaimed.
5. Tires worn beyond the Tread wear indicator.
6. Ride complaints after the first 25% tread wear.
7. Ozone or weather checking on tires over 3 years from the date of manufacture.

5. WHEN DOES THE WARRANTY END?

A tire has delivered its full original tread life and the new tire coverage of this warranty ends when the tread wear indicators become visible, or three(3) years from the date of original tire manufacture or new tire purchase date (without proof of purchase, date of manufacture will be used or determine age).

6. OBLIGATIONS

In order to be eligible for the limited Warranty Service, a Official Warranty Claim Form must be filled out and sent into Shandong Haohua Tire along with DOT number(s) and serial number(s) cut off from the tire, picture(s) of the tire and of the adjustable condition visibly marked on the tire.

7. DISCLAIMER

This warranty, or any warranty stated or referred to herein, is exclusive and in lieu of any other warranty regarding the quality of tires, whether expressed or implied, and remedies for breach thereof shall be limited to those specifically provided herein.

8. Remark

Proper vehicle and tire care is necessary to obtain the expected wear from a tire, It is your obligation to properly maintain your tires and the vehicle upon which they are mounted, including:

(A) Operating your tires at the inflation pressure recommended by the vehicle manufacturer
(B) Keep your tire/wheel assemblies in balance.
(C) Maintain proper wheel alignment.